

Code:DA-E904014

LED Bollard

- CE & RoHS Compliant



Features

- Durable Aluminium Extruded Body and Polycarbonate Lens providing good levels of Vandal resistance
- Two Options for PC Lens: Clear and Grid
- Black Coated Louvered Controller providing Symmetrical Distributions and Minimal Glare
- High Power Factor >0.9
- Wide Voltage 10-240VAC
- IP54
- Extra Long Lifespan

Specification

Light Source	LED
Color Temperature (CCT)	3000K-5000K
Initial Luminous flux (Total)	830 Lumen -1300lumen
Color Rendering index (CRI)	>70
Power Consumption	15W 20W 25W 30W
Power Factor	>0.9
Input voltage	100~240vAC
Height:	700MM, 800MM, 1000MM, 1200MM



DA Lighting


Unit 5, 3 Lancaster Street INGLEBURN NSW 2565

TEL: 02 8006 9016

Email :info@dalighting.net.au

web: www.dalighting.net.au

Dimension:

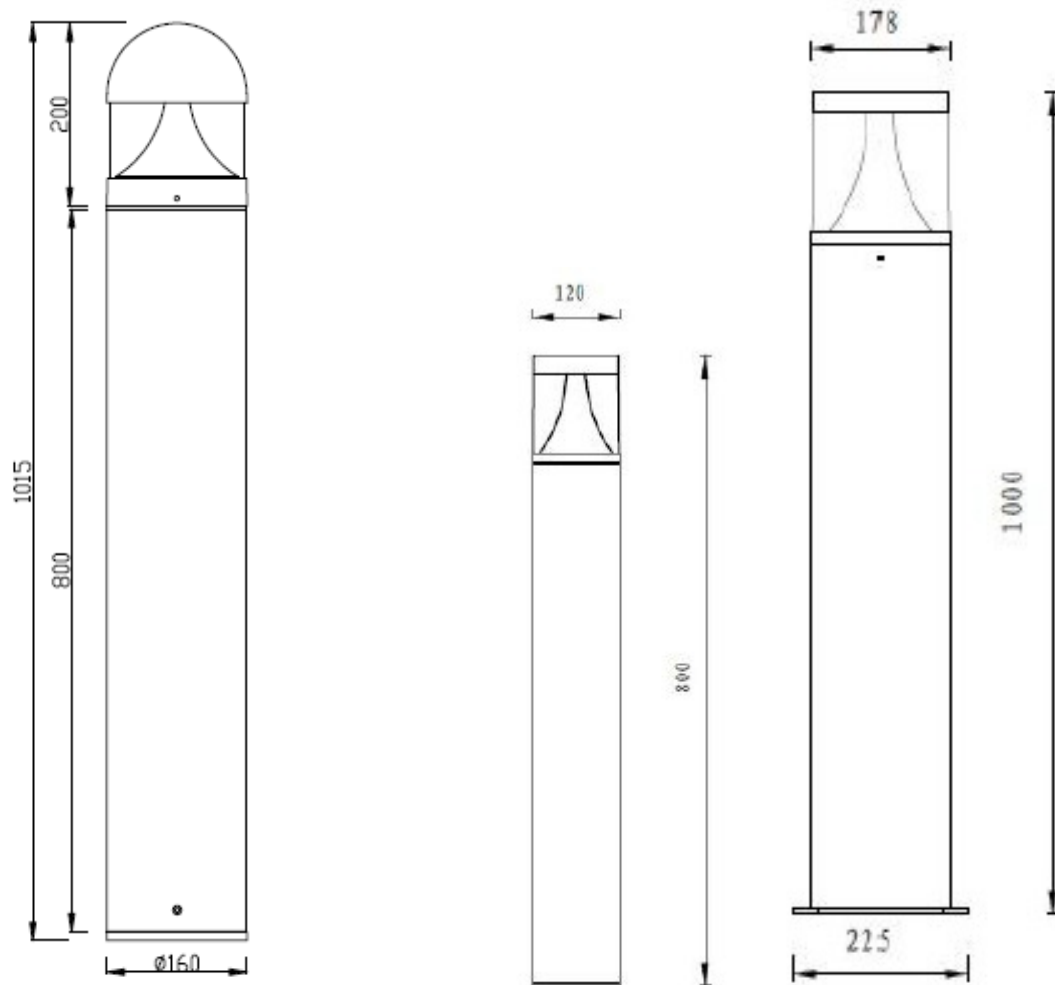

DA Lighting

Unit 5, 3 Lancaster Street INGLEBURN NSW 2565

TEL: 02 8006 9016 Email :info@dalighting.net.au web: www.dalighting.net.au