

Model:

DA272780



CE & Energy Star Compliant



Features

- IP54 rated
- Life over 50,000 hrs
- CCT 3000k, 4000k
- Powder Coated for Corrosion protection & UV Protection.
- CRI>70
- Polycarbonate Diffuser
- White Color Finish Avail.
- **2 year Warranty**



Specification

Model	DA272780
Light Source	LED Epistar
Power	20w
Dimension	270x270x80 mm
Lumen	720 lm
CCT	3000k, 4000k
Life Span	50,000 hrs
Voltage	100-240v AC
Material	Powder Coated Aluminum
IP Rating	IP54

Benefits

- Extra Long Life More than 50,000 hours
- Save up to 80% of energy Consumption & reduce maintenance costs
- Virtually no heat or UV output
- No Mercury & Resistant to Shock and vibration

Optical Performance

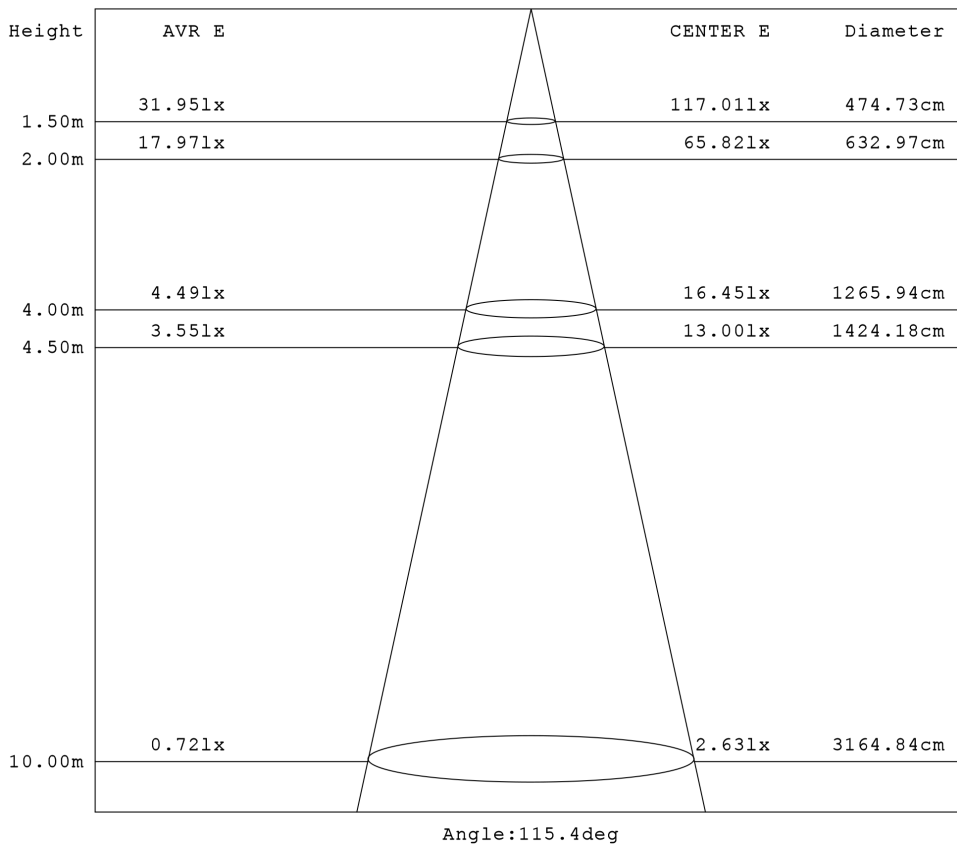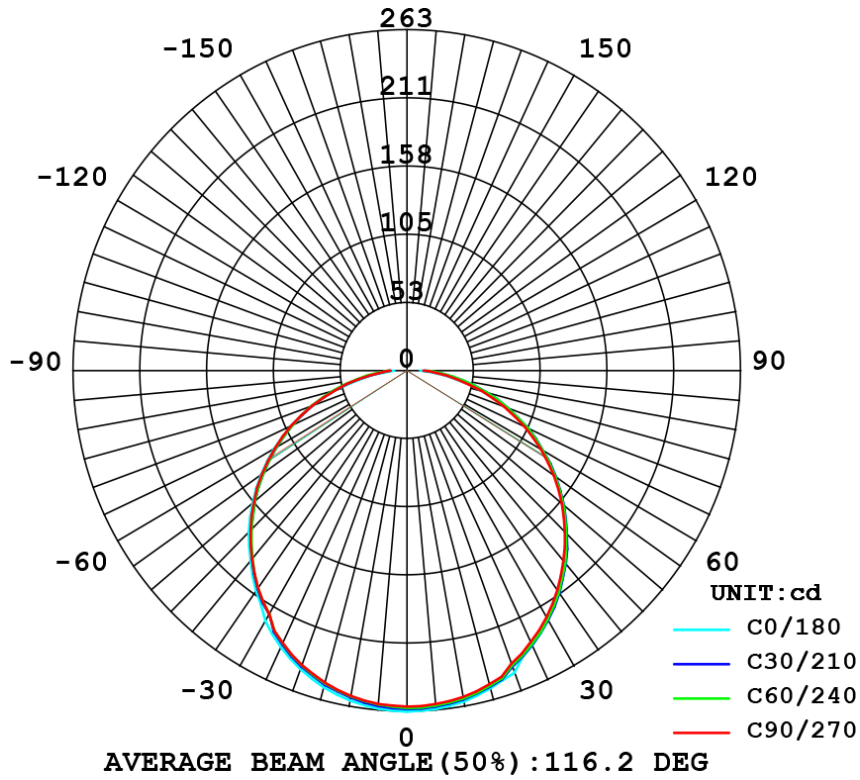

Application



Installation Examples

- Outdoor Area
- Wall Mounted
- Ceiling Mounted
- Corridor Area
- Garden, Park