




Model: DHL-999035

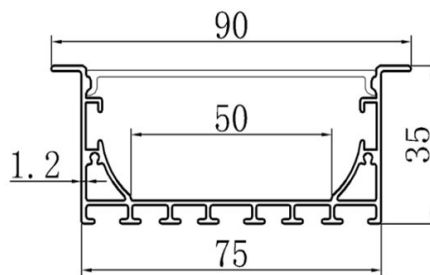

CE & Energy Star Compliant

IP20

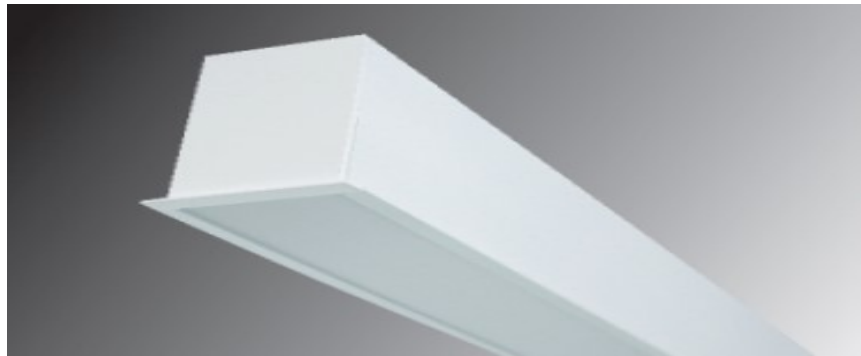

Features

- Aluminum Structure Anodized
- Extra High performance SMD LEDs with controlled Color consistency and Uniformity
- High-efficiency with accurate light dissipation and modularized design
- High quality aluminum heat sink providing optimized thermal path.
- Anti-Corrosion, Anti-UV
- System light Efficiency 85%
- Warranty: 5 years



Specification

Initial Luminous flux (Total)	2500lm
Color Temperature (CCT)	3000K/4000K/6000K
Dimension (mm)	1200mm x 90mm x 35mm
Cut-out (mm)	80mm
Color Rendering index (CRI)	>80
Power Consumption	30W
Power Factor	>0.9
Material	Aluminium 6063
AC Input	240vAC
Body Color	Silver /White / Black
Light Beam Angle	110°

Benefits

- Extra Long Life More than 50,000 hours
- Save up to 80% of energy Consumption & reduce maintenance costs
- Virtually no heat or UV output
- No Mercury & Resistant to Shock and vibration

Optical Performance

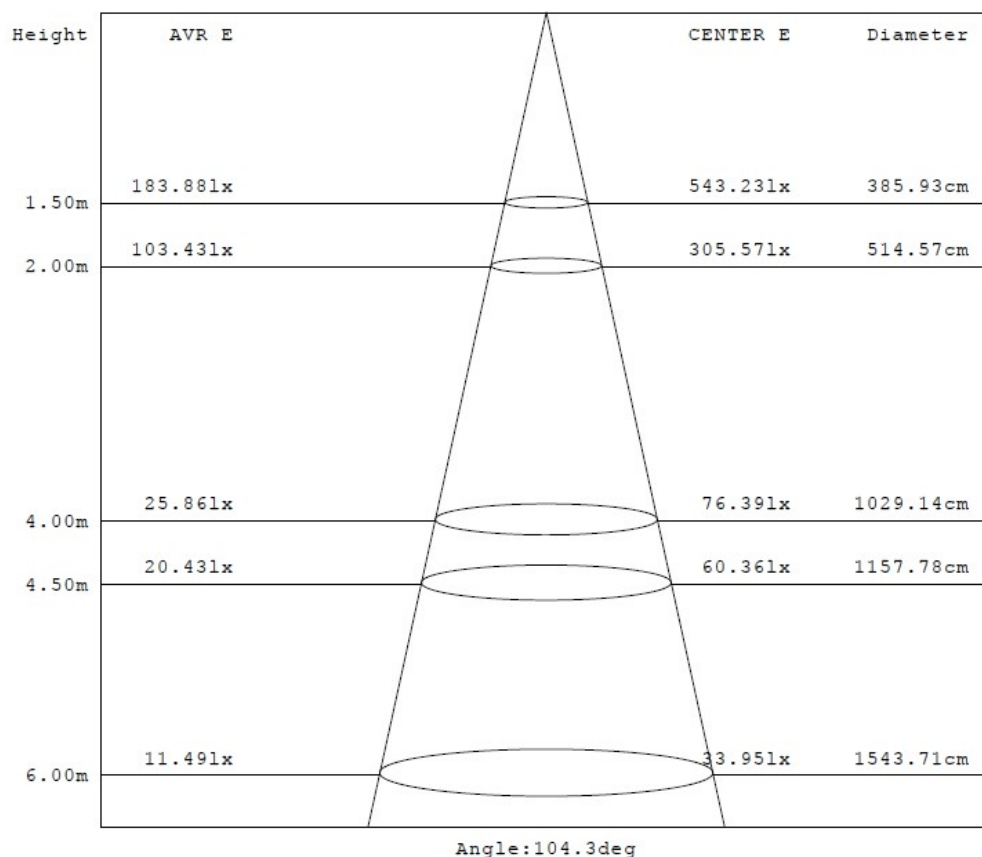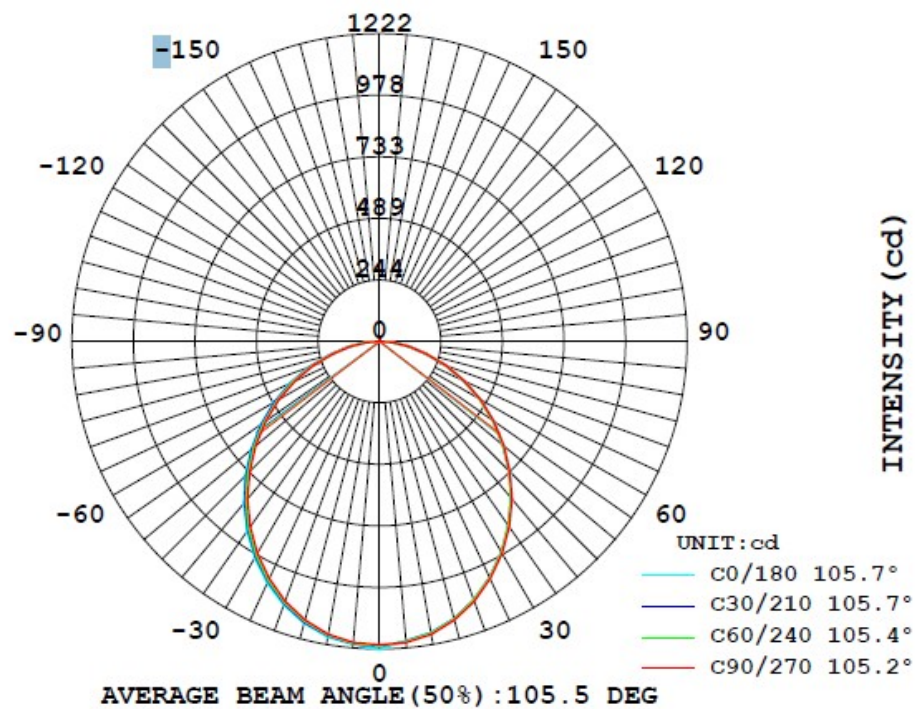


Application



Indoors Application

- Showroom
- Product Line, Warehouse
- Shopping Area
- Conference Room
- Offices, Education facilities

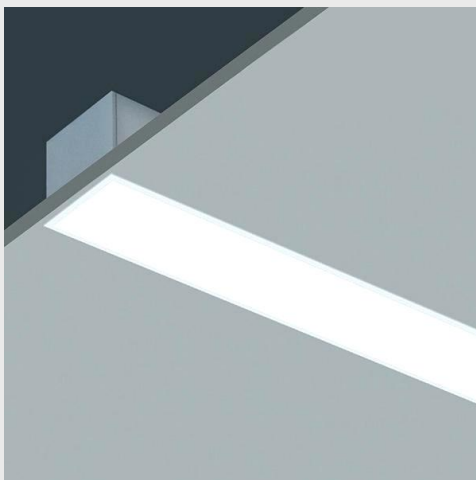

Installation

Wall Recessed

