


**Model:
DA2001074**



CE & Energy Star Compliant

IP54

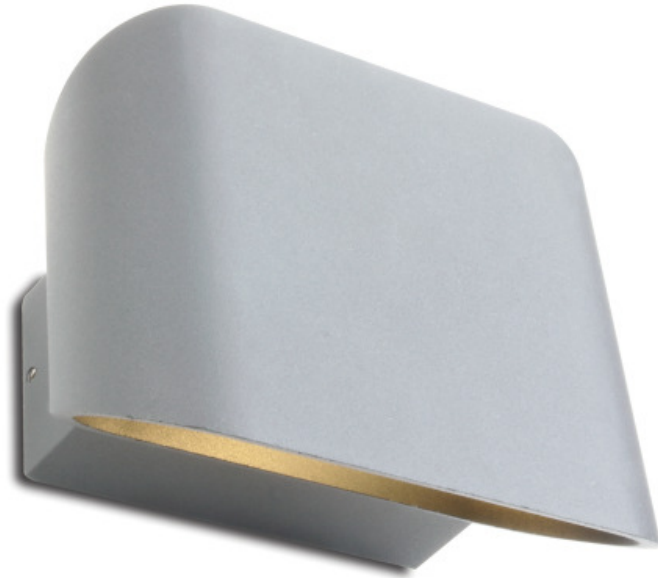



Features

- Die-casting aluminum body
- Wall Surface Mount
- Glass diffuser
- Plastic connecting terminal
- IP54 Class I
- Warranty: 3 years



Specification

Light Source	SMD
Initial Luminous flux	380 lm
Color Temperature (CCT)	3000K/4000K/6000K
Dimension (mm)	160mm x 90mm; 125mm x 90mm
Color Rendering index (CRI)	>80
Power Consumption	7w
Power Factor	>0.9
Material	Aluminium Body/Glass Diffuser
AC Input	240vAC
Finish	White / Black / Sliver

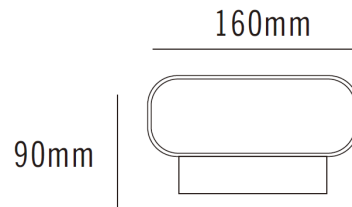

Benefits

- Extra Long Life More than 50,000 hours
- Save up to 80% of energy Consumption & reduce maintenance costs
- Virtually no heat or UV output
- No Mercury & Resistant to Shock and vibration

